

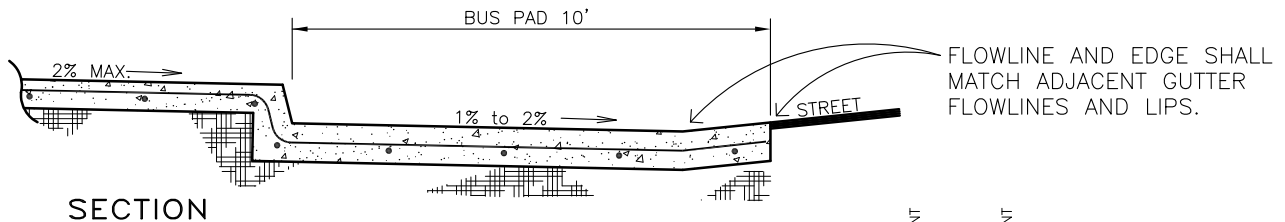
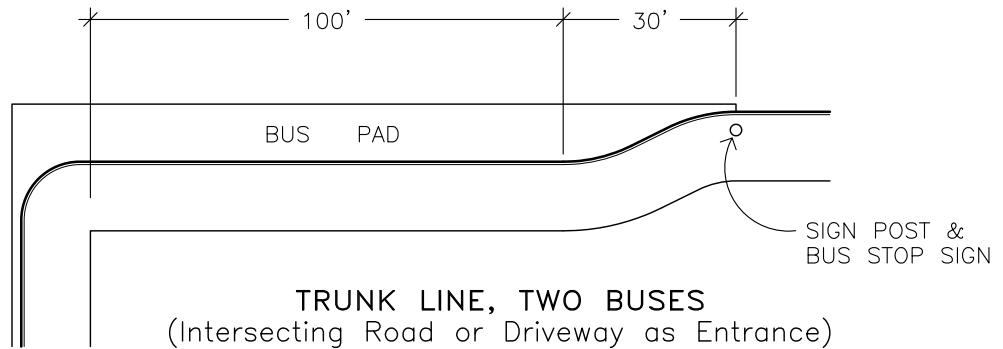


# BUS TURNOUT DIMENSIONS FOR BUSES 8'6" WIDE AND THIRTY SIX (36') TO FORTY (40') FEET LONG

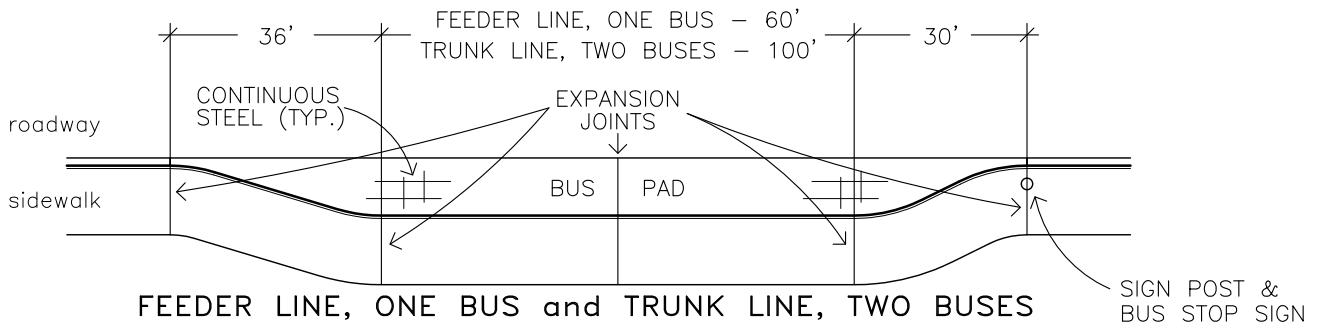

### MONOLITHIC POUR NOTES:

1. Reinforce 10' wide bus pad and sidewalk within turnout. 8" Class 2 concrete with #4 @ 24" o.c. both ways reinforcing over 6" Class 2 Aggregate Base.
2. Curb height 8" maximum.
3. See Engineering Standards #4030 & #4110 for Curb, Gutter and Sidewalk.
4. See Engineering Standard #4910 for sawcutting existing PCC.
5. See Engineering Standard #7210 for Sign Post.
6. Score at 10' intervals.

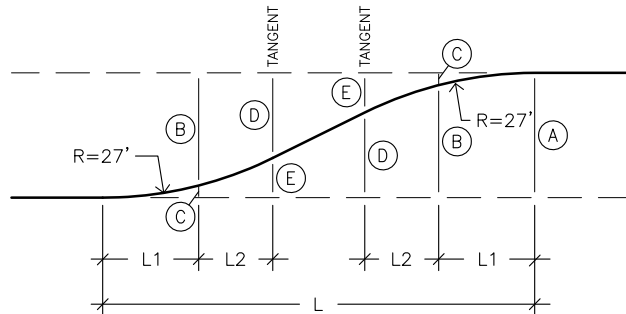

L	L1	L2	A	B	C	D	E
36	4.25	4.00	8.50	8.20	0.30	7.30	1.20
30	6.33	5.87	8.50	7.80	0.70	5.65	2.85

**REVERSE TAPER – GEOMETRICS**

REVISIONS	BY	APP	DATE
Misc Notes and Section	MH	BL	8-07
Revise geometrics	DVB	BL	10-08
Revise re-bar specs	JDL	WAP	11-98
STANDARD CURRENT AS OF:		January 2010	



## CONCRETE BUS TURNOUT